

NEED		PURCHASING SPECIFICATION		REQUEST FOR APPROVAL		DELIVERY DRAWING		INSPECTING STANDARD		QC-PROCESS	
GEN. TDL. 一般品	DRAFT ANG. 図面角度	OUTSIDE	INSIDE	LAST WALL THICK 最後壁厚	NORMAL DIA DIVISION	5 TO	10 TO	18 TO	30 TO	L-CAST	
		2/100	3/100		S MAX	= 10	= 18	= 30	= 50		
					SANDMOLD	±1.0	±1.5	±2.0	±3.0		±3.5
		2/100	3/100		SHELL	±0.8	±1.0	±1.5	±2.0		±2.0

120 MAX	120 TO	250 TO	400 TO	800 TO	1600 TO	3150
11.0	11.5	12.0	13.0	14.0	15.0	16.0

0.5 TO	6 TO	10 TO	30 TO	120 TO	400 TO	1000 TO	2000 TO	4000 TO
1.0	1.5	2.0	3.0	4.0	5.0	6.0	7.0	8.0




10 MAX	10 TO	50 TO	120 TO	400 MIN
11.0	11.5	12.0	13.0	14.0

FIGURE DIMENSION




GT.CODE

○ AND/RADIAL

CAREER

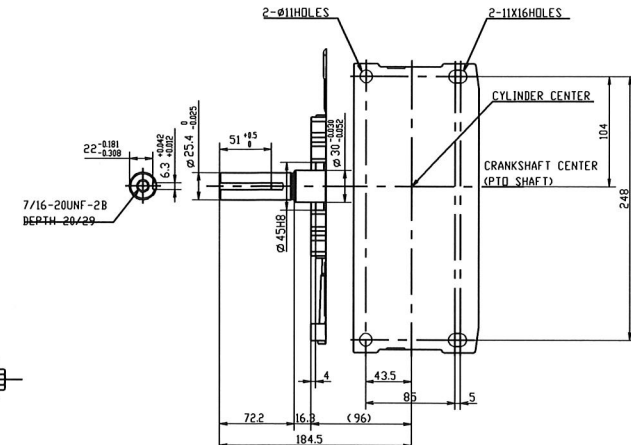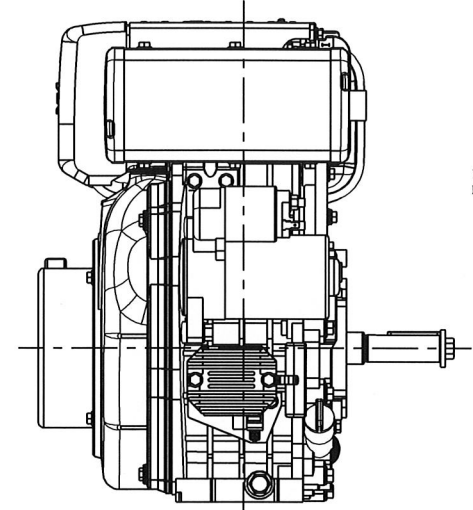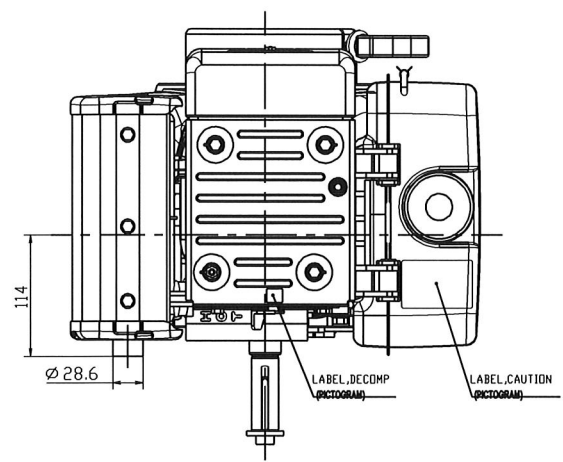

ENGINE MOUNTING PLATE AND PTO SHAFT
SEEN THROUGH FROM THE TOP OF THIS ENGINE

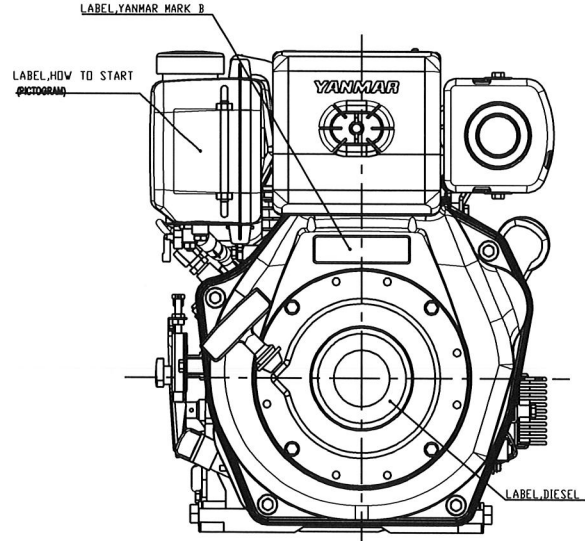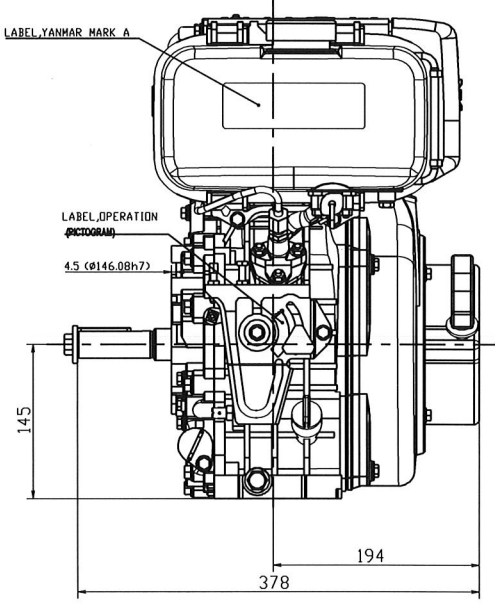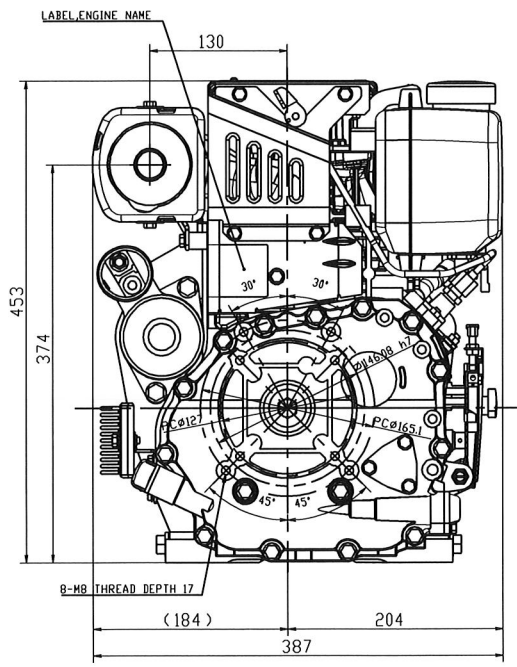

WEIGHT (GROSS)	kg	MANAGER	MANAGER
WEIGHT (CALC.)	kg	SCALE	FREE
S. ENGINEER	MANAGER	MODEL	
CHECKED	SPECIALIST	QTY	
DESIGNED	DRAWN	DATE/Y/M/D	NAME
R. 11/10/2010	H. 28/10/2010	28 MAY. 2010	L70N5-METMYI OUTLINE
YANMAR		CODE	B2-14820-0210
POWER SYSTEM OPERATIONS DIV., YANMAR CO., LTD.			A1

With respect to the use of environmentally hazardous substances for the parts, the substances in use shall conform to the "Restriction of Use for Environmentally Hazardous Substances".

3D-CAD

NOTICE