

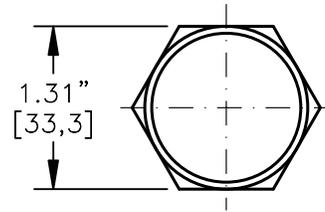
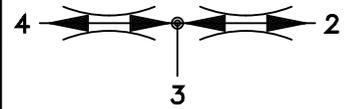


FLOW DIVIDER/COMBINER VALVE  
SPOOL TYPE

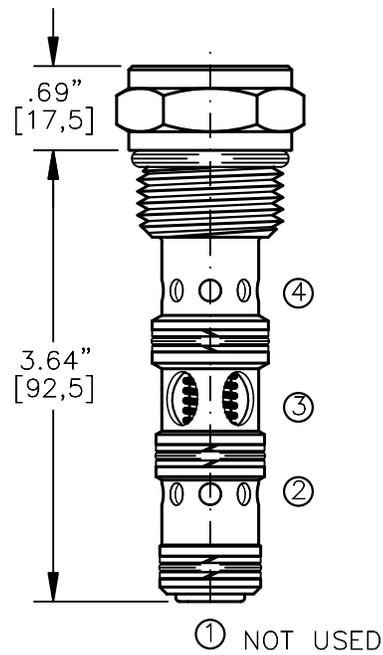


TORQUE to 80/90 Ft-Lb.  
[108/122 N-m]

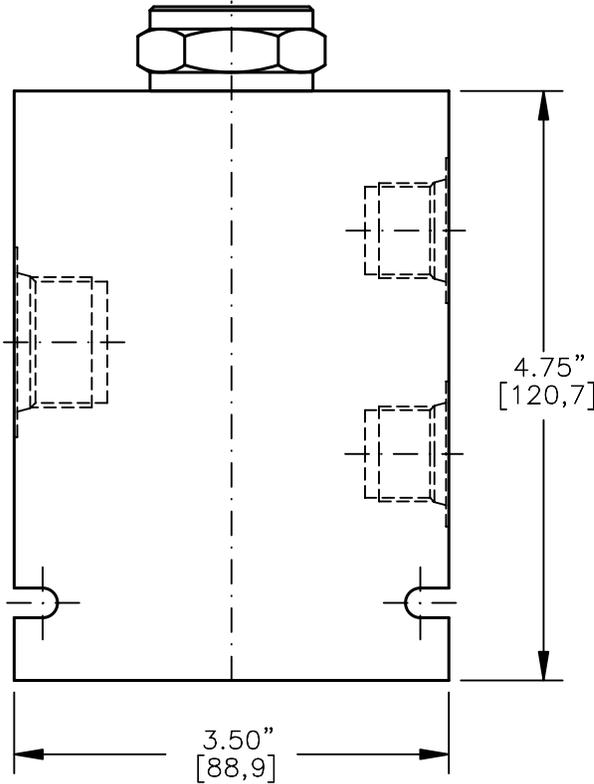

PORT #3 (INLET) IS ONE SIZE LARGER THAN PORTS #2 & #4 (OUTLETS).  
FOR ALUMINUM OR STEEL VALVE HOUSING CONFIGURATIONS SEE PAGE 0-043.2

**FDCV-12-X-X-XX**

FDCV-12-X-X-XX		FLOW DIVISION		FLOW		
BASIC	SIZE	CODE	PORT#2		PORT#4	MAX
	12 = 1.062-12 UNF	11	50%	50%	4.0	GPM
		22	50%	50%	8.0	GPM
		33	50%	50%	12.0	GPM
		44	50%	50%	16.0	GPM
		66	50%	50%	24.0	GPM
		88	50%	50%	32.0	GPM
		12	33.3%	66.6%	6.0	GPM
		13	25%	75%	8.0	GPM
		24	33.3%	66.6%	12.0	GPM
		26	25%	75%	16.0	GPM
		36	33.3%	66.6%	18.0	GPM
		48	33.3%	66.6%	24.0	GPM
		21	66.6%	33.3%	6.0	GPM
		31	75%	25%	8.0	GPM
		42	66.6%	33.3%	12.0	GPM
		62	75%	25%	16.0	GPM
		63	66.6%	33.3%	18.0	GPM
		84	66.6%	33.3%	24.0	GPM

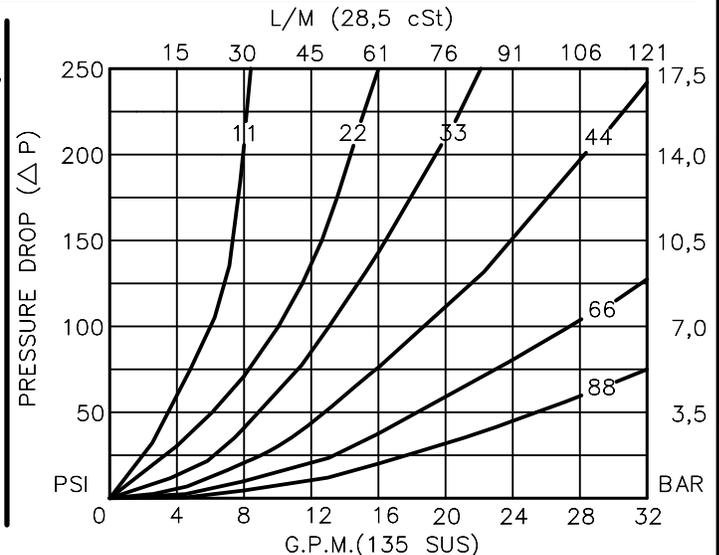

## FLOW DIVIDER/COMBINER VALVE SPOOL TYPE

### DESCRIPTION

This unit is a spool type, screw in cartridge style, flow divider/combiner valve.

### OPERATIONS

This valve divides flow from port 3 to ports 2 and 4 and combines flow from ports 2 and 4 to port 3 at the specified flow division regardless of load or system pressure.

Should the circuit operation result in blockage of either port 2 or 4, the opposite port will continue to flow but at a reduced flow rate to synchronize a cylinder.

### FEATURES AND BENEFITS

Flow accuracy dividing or combining:

+/-5.0% of flows under 40% of the rated flow.

+/-2.5% of flows over 40% of the rated flow.

Quiet and stable operation over wide varying flow, pressure and temperature range.

All external carbon steel parts are plated for longer life against the elements. All cartridge valves are 100% functionally tested.

Ports 2 & 4 (outlets) are stepped down one size from port #3 (inlet).

### SPECIFICATIONS

OPERATING PRESSURE: 5,000 PSI [350 Bar]

PROOF PRESSURE: 10,000 PSI [700 Bar]

FLOW: 32.0 GPM [121 l/m] nominal. See performance chart.

VALVE HOUSINGS: 2500 PSI [175 Bar] = Aluminum - Anodized.

5000 PSI [350 Bar] = Steel - Unplated.

OPERATING TEMPERATURE: -40° to +250° F. [-40° to +120° C.]

OPERATING MEDIA: All general purpose hydraulic fluids such as MIL-H-5606, SAE-#10, SAE-#20, etc.

INSTALLATION: No restrictions.

SEAL KIT: SKN-1242 Buna "N".

SKV-1242 Viton.

WEIGHT: .62 lb [.28 kg] cartridge only.

VALVE CAVITY: #C1240, See Page 0-043.0.

info.el@bucherhydraulics.com

www.bucherhydraulics.com/commoncavity

© 2015 by Bucher Hydraulics, Inc., 2545 Northwest Parkway, Elgin, Illinois 60124, USA

All rights reserved.

Data is provided for the purpose of product description only, and must not be construed as warranted characteristics in the legal sense. The information does not relieve users from the duty of conducting their own evaluations and tests. Because the products are subject to continual improvement, we reserve the right to amend the product specifications contained in this catalogue.