

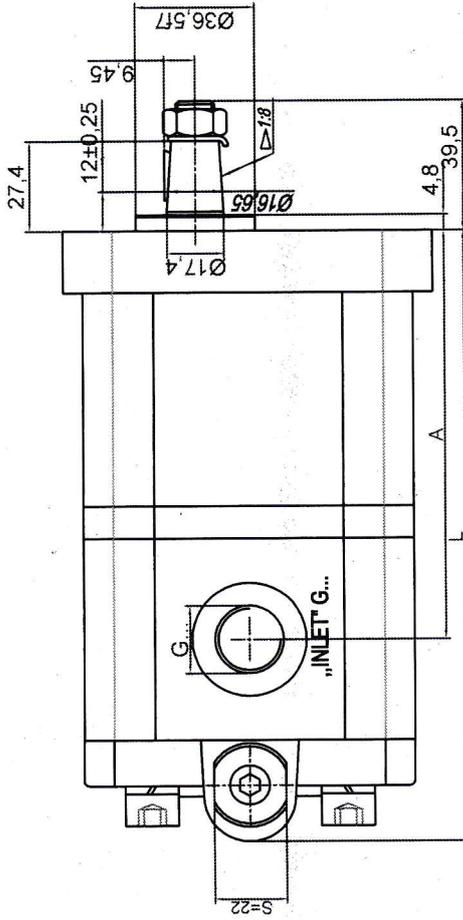




22C .../... X956 GHL

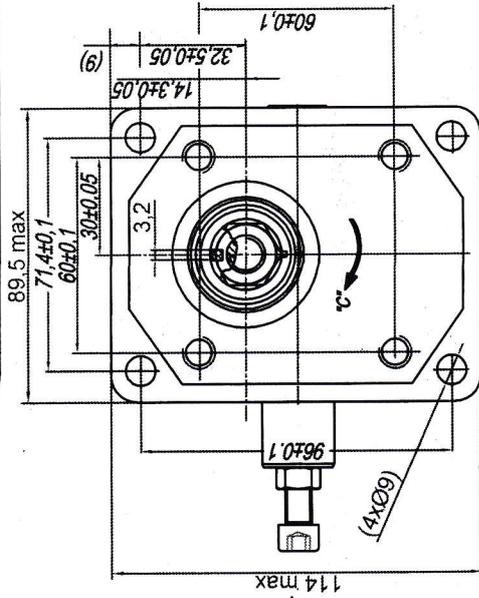

Type	Displacement [cm ³]		Pmax [bar]	nmax [rpm]	L [mm]	"INLET" G...	A	"OUTLET" G1/2
	l	ll						
22 C 4.5/11 X 956 GHL	4,5	11	250bar	50bar	165,54	3/4"	105	
22 C 8.2/14 X 956 GHL	8,2	14	250bar	50bar	175,79	3/4"	113,1	
22 C 8.2/16 X 956 GHL	8,2	16	250bar	50bar	188,28		108,4	
22 C 10/19 X 956 GHL	10	19	250bar	50bar	188,91	1"	120,2	
22 C 15/25 X 956 GHL	15	25	250bar	50bar	204,8	1"	133,1	
22 C 14/14 X 956 GHL	14	14	250bar	50bar	185,3	3/4"	122,6	
22 C 6.3/16 X 956 GHL	6,3	16	250bar	50bar	178	3/4"	111,7	
22 C 6.3/15 X 956 GHL	6,3	15	250bar	50bar	174,4	3/4"	110,9	
22 C 4.5/10 X 956 GHL	4,5	10	250bar	50bar	163,44	3/4"	104	
22 C 10/22 X 956 GHL	10	22	250bar	50bar	191,91	1"	122,7	
22 C 14/14 X 956 GHL	14	14	250bar	50bar	203,3	1"	131,6	3/4"
22 C 14/14 X 956 GHL	14	14	250bar	50bar	200,0	1"	138,8	3/4"
22 C 4.5/14 X 956 GHL	4,5	14	250bar	50bar	189,93	3/4"	107,23	1/2"

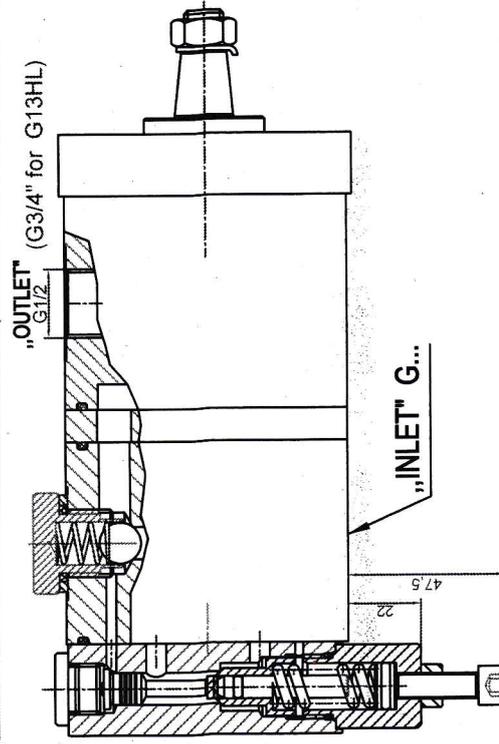

outlet
G1/2 (G3/4" for G13HL)



Gaproni
hydraulic components & systems

fax: +359 431/ 62 230
telex: 088 508
tel: +359 431/ 62 227
62 229