

Hand pumps

PMO 50 byB-s

Tech sheet


DETAILS

with release hand knob
with pressure relief valve
double acting hand pump for single acting cylinder
for fixing to wall



SPECIFICATIONS

Cast iron body
Piston treated with Niploy
White zinc plated support lever
Lever connection $\varnothing 27$
White zinc plated external parts
Standard colour black
Pressure relief valve standard setting: 100 bar

HYDRAULIC DIAGRAM

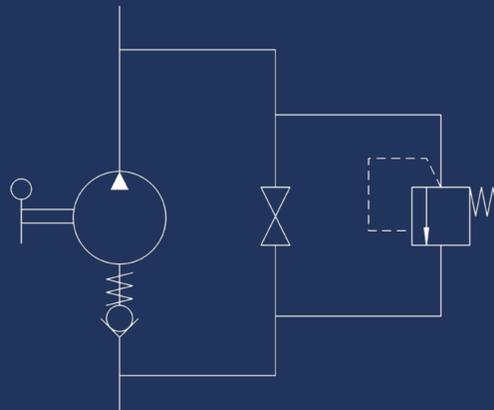

EFFORT DIAGRAM

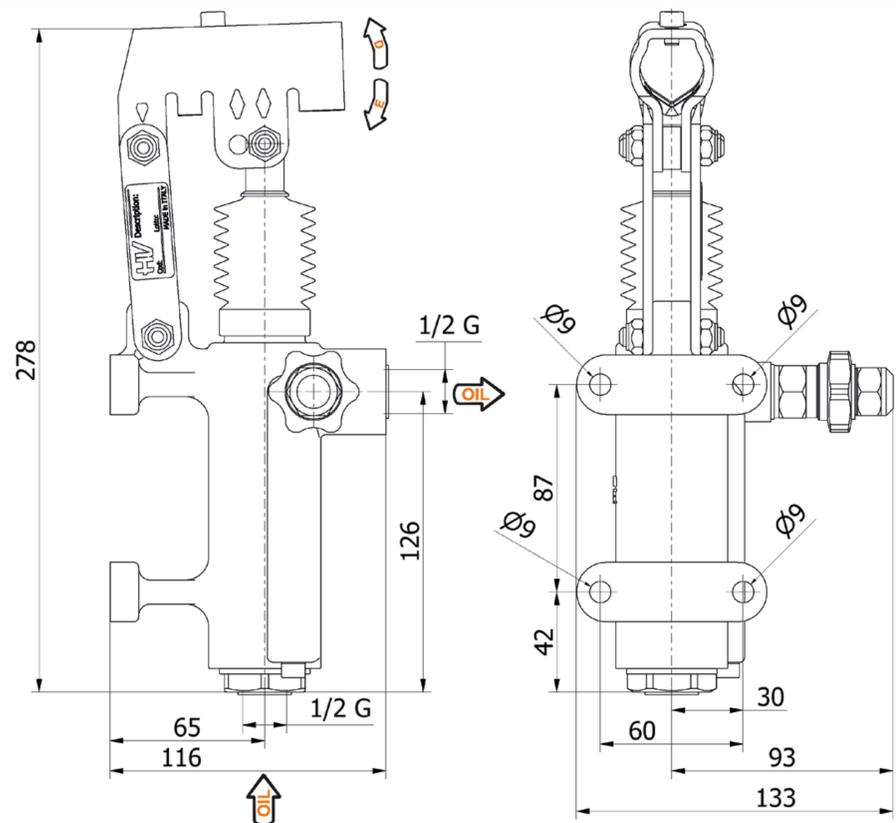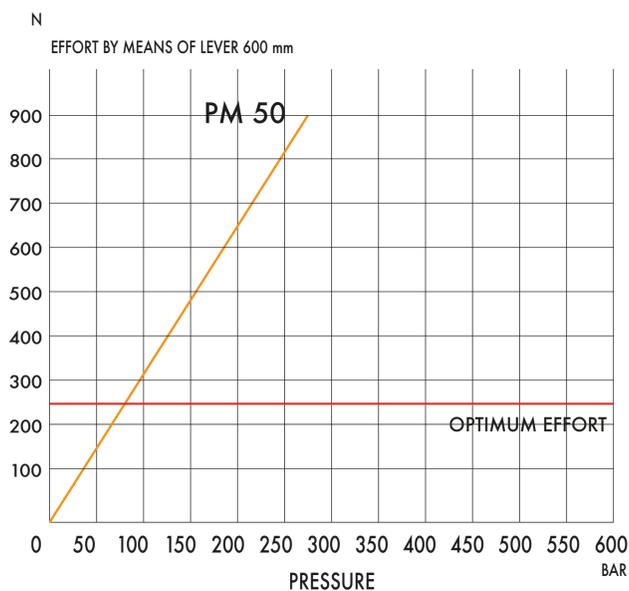

| DISPLACEMENT cm ³ | A mm | B mm | C mm | D ° | E ° | ACTUAL DISPLACEMENT cm ³ | PRESSURE BAR | | MASS KG | CODE |
|---------------------------------|---------|---------|---------|--------|--------|---|--------------|-----|------------|-----------|
| | | | | | | | OPTIMAL | MAX | | |
| 50 | -- | -- | -- | 38 | 37 | 43,825 | 80 | 280 | 3,400 | 6077.0037 |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |



HV Hydraulic s.r.l. | Take YOU to another WORLD

Head Office
Via dell'Agricoltura, 162 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy

Warehouse
Via del Lavoro, 111 e 135 Loc. Castello di Serravalle
40053 VALSAMOGGIA (BO) Italy