
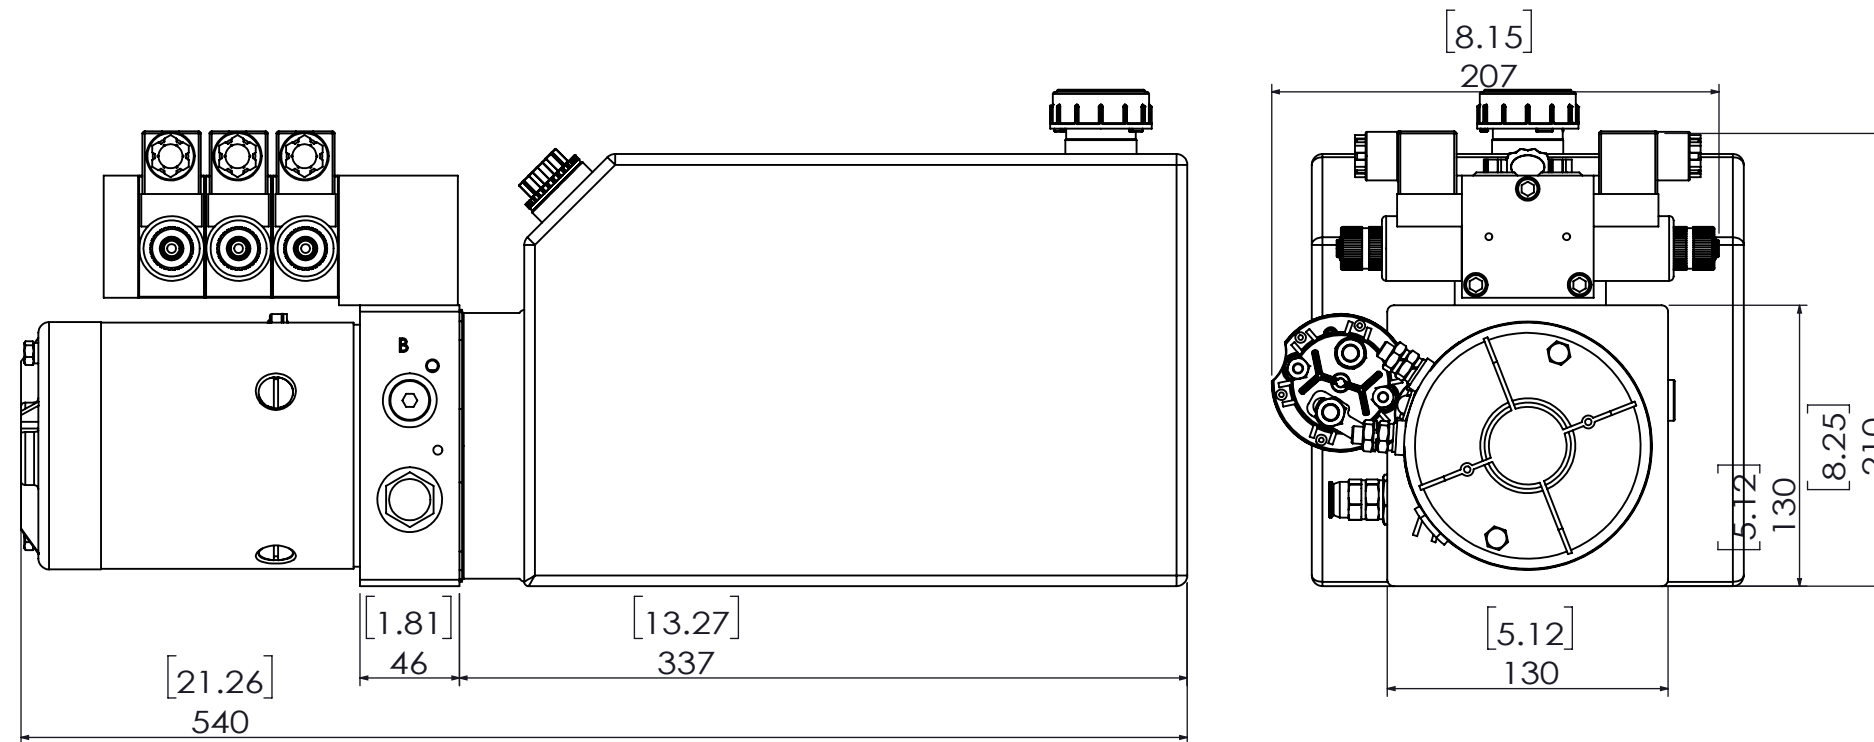


**THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIREMENTS.
A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.**

APPROVED BY _____ APPROVAL DATE _____/_____/_____

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX
XXX	XXX	00/00/00	XXX	XXX
XXX	XXX	00/00/00	XXX	XXX

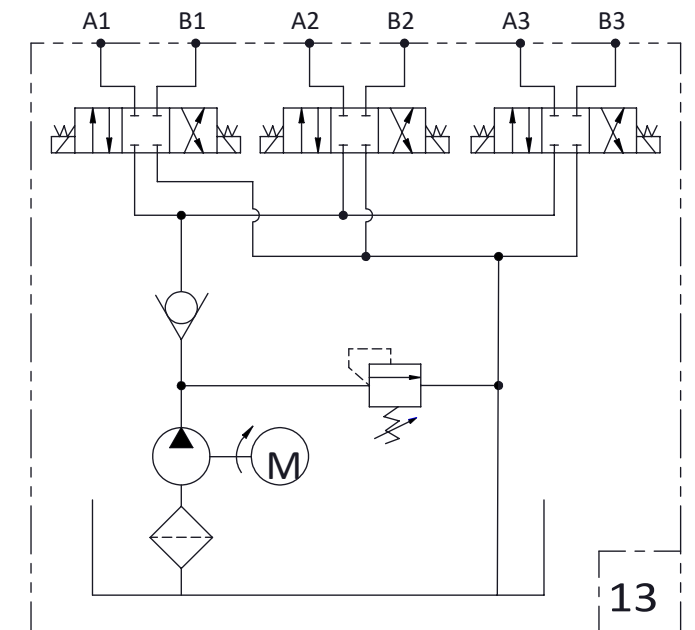

Network标签




MODEL 16DA133ZH213B-SV

Relief Valve Setting 2200PSI

Motor(KW) 1.6KW Voltage 12V

Pump Disp 2.1ML Flow 5.2LPM

Tank Usable 10 Litres

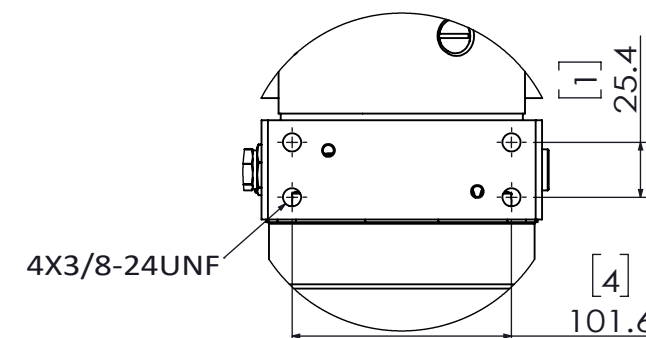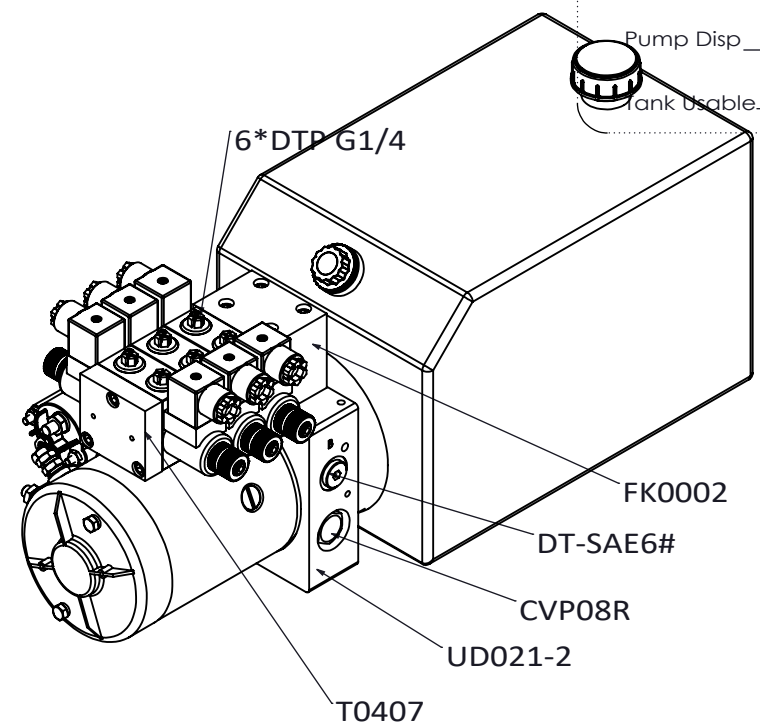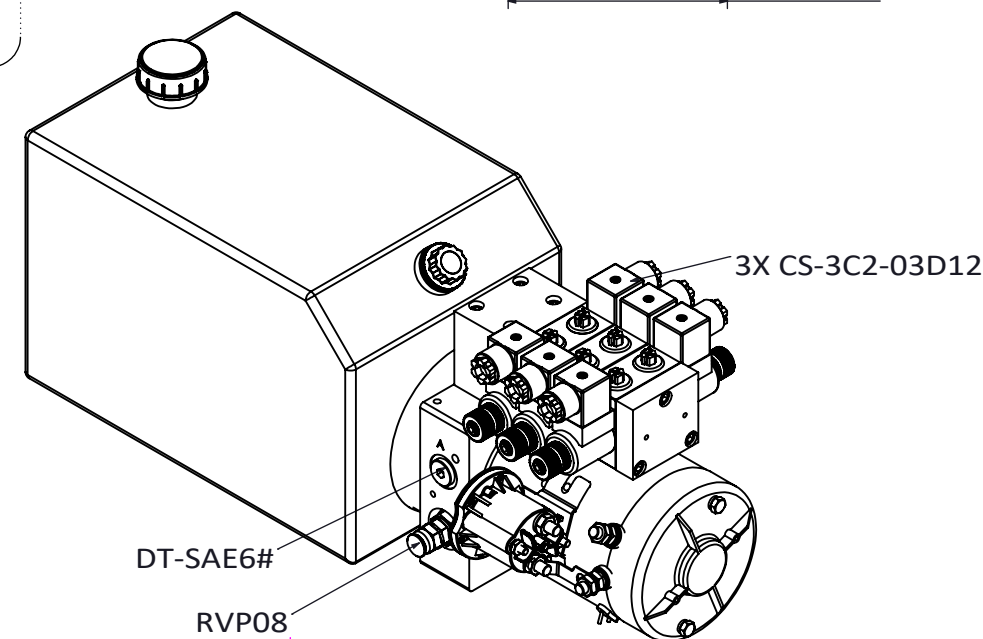

TOLERANCE :mm

> 0	±0.1
> 6	±0.2
> 30	±0.3
> 120	±1
> 315	±2
> 1000	±5

MOCEN

www.mocen.com.cn

SPECIFICATIONS

ELECTRICAL MOTOR	416A-2P-M,DC12V,1.6KW	
FLOW RATE	5.2LPM@1500PSI	
MAX. PRESSURE	3000PSI	
RELIEF SETTING	2200PSI	
GEAR PUMP DISP.	G210T 2.1mL/REV	
RESERVOIR	MT3 10L	
REMOTE CONTROL	N/A	
MOUNTING	HORIZONTAL OR VERTICAL	
PORTING	A/B 1/4BSPP	
DESIGNED_BY KMC	APPROVAL_BY ***	APPROVAL DATE. 2021/05/10
UNIT:[inch]mm	 	REFER TO

CUSTOMER	FILE NAME	SCALE
16DA133ZH213B-SV	*	1:3

HYDRAULIC POWER UNIT

DP13H15O3-416A-MT3-01	REVISION A	PAGES 1 / 4
-----------------------	---------------	----------------