
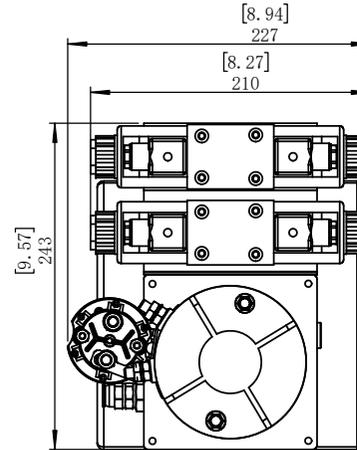


THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIREMENTS.
A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.




APPROVED BY _____ APPROVAL DATE ____/____/____

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX
XXX	XXX	00/00/00	XXX	XXX
XXX	XXX	00/00/00	XXX	XXX

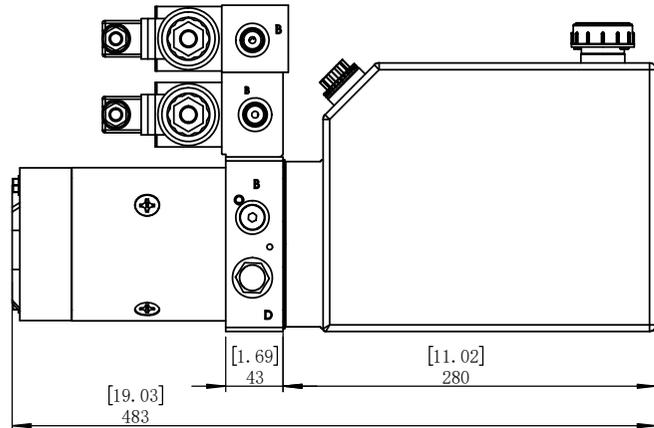

Network 标签

MODEL	16DA132ZH212B		
Relief Valve Setting	2500PSI		
Motor(KW)	1.6KW	Voltage	12V
Pump Disp	2.1ML	Flow	5.2LPM
Tank Usable	7.5	Litres	

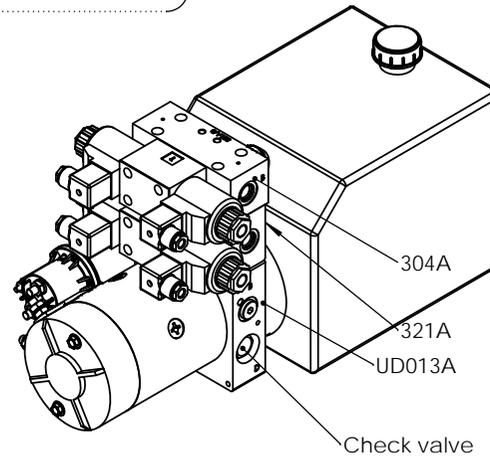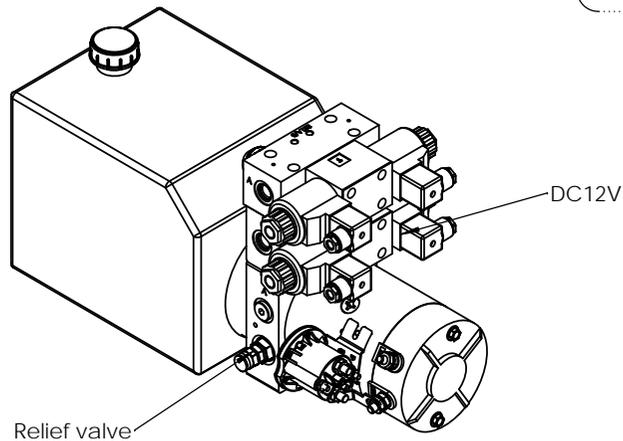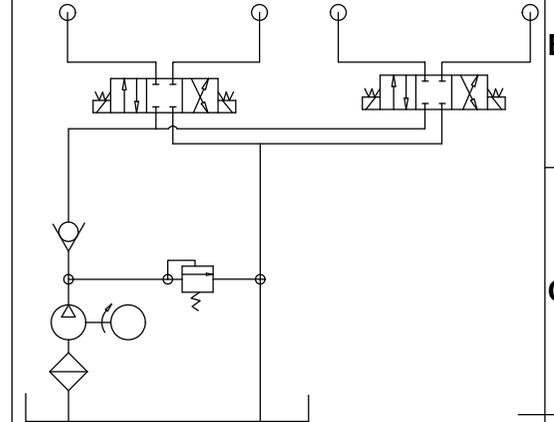

TOLERANCE :mm	
> 0	±0.1
> 6	±0.2
> 30	±0.3
> 120	±1
> 315	±2
> 1000	±5



SPECIFICATIONS	
ELECTRICAL MOTOR	416A-2P-M DC12V 1.6KW
FLOW RATE	5.2LPM@1500PSI
MAX. PRESSURE	3000PSI
RELIEF SETTING	2500PSI
GEAR PUMP DISP.	G210T 2.1mL/REV
RESERVOIR	MT2,STEEL ,7.5L
REMOTE CONTROL	N/A
MOUNTING	VERTICAL OR HORIZONTAL
PORTING	SAE6#

DESIGNED BY KMC	APPROVAL BY ***	APPROVAL DATE 2020/2/11
UNIT:[inch]mm		REFER TO

CUSTOMER 16DA132ZH212B	Material number 010101-0078	SCALE
---------------------------	--------------------------------	-------

HYDRAULIC POWER UNIT

16D130-032.	REVISION A	PAGES /
--------------------	---------------	------------