




CODICE ORDINAZIONE ORDERING CODE

01	02	03
CUR6		

01	VALVOLE UNIDIREZIONALI SAE8 (SAE8 CHECK VALVES)		CUR6
02	TENUTA (SEALING)	Tenuta a sfera - solo molla 1 bar (Ball sealing - only spring 14,5 PSI)	SF
		Tenuta ad otturatore (Poppet sealing)	SP
03	MOLLA (SPRING)	1 bar (14,5 PSI)	1
		3 bar (43,5 PSI)	3
		4,5 bar (65,3 PSI)	4,5

PERFORMANCES

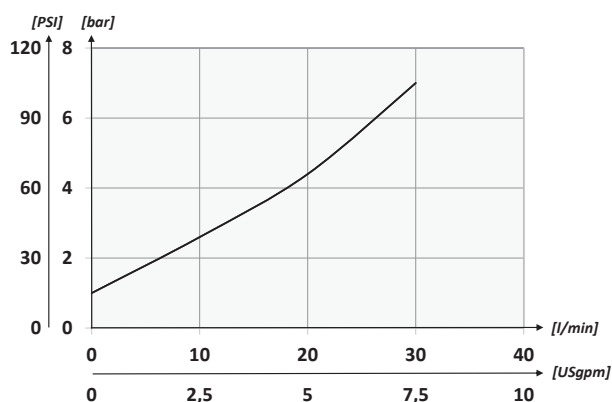


SCHEMA IDRAULICO / HYDRAULIC CIRCUIT



DATI TECNICI / TECHNICAL DATA

Olio idraulico - Mineral oil	ISO 6743/4 (DIN 51524)
Viscosità olio - Oil viscosity	15-250 mm²/s (15 to 250 cSt)
Classe di contaminazione max Max contamination index	ISO 4406:1999 Classe 19/17/14
Temperatura dell'olio - Oil temperature	-20°C +80°C -4°F +176°F
Temperatura ambiente - Environment temperature	-20°C +50°C -4°F +122°F
È indispensabile l'utilizzo di un filtro per proteggere la valvola (filtrazione consigliata 15 µm) It is necessary a filter use to protect the valve (advised filtration 15 µm)	
Trafilamento massimo Max leakage	0,25 cm³/min - 5 gocce/min 0,015 in³/min - 5 drops/min

mm
(Inches)

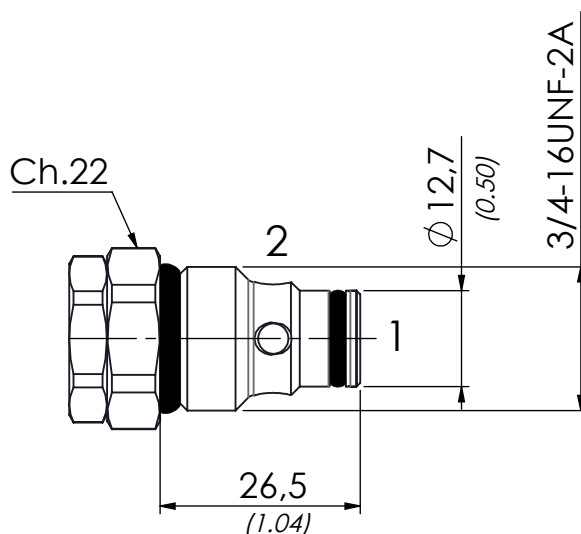

CARATTERISTICHE TECNICHE / TECHNICAL CHARACTERISTICS

TIPO TYPE	PORTATA MAX (l/min) MAX FLOW (USgpm)	PRESSIONE MAX (bar) MAX PRESSURE (PSI)	PESO APPROX (kg) APPROX WEIGHT (lb)	COPPIA DI SERRAGGIO TIGHTENING TORQUE Nm-lbf ft	CAVITÀ CAVITY
CUR6	25 (6,6)	350 (5075)	0,06 (0,13)	25-30 (19-22)	SAE8/2