

Foot Mounts

HFB Series

Features and Handling


• Foot bracket kits can be used to mount pumps or motors having standard SAE-J744 2-bolt A, B, or C mounting flanges. These designations correspond to -A-, -B-, and -C- letters in the kit model number. Each kit includes a bracket and screws for mounting to the pump or motor. Kits are not included with pumps and motors and must be ordered separately by model number.



Specification

Model	FOOT FOR HV10, HV20, HV, HVQ, HVT, HVQT, HT6, HT7, HT67, HM
HFB-A	- HV10, HV20, HV10P, HV10F, HV20P, HV20F - HM2-210
HFB-B	- 20HV/HVQ, 25HV/HVQ - 25HVT/HVQT - HV2010, HV2020, HV2010P, HV2010F, HV2020P, HV2020F, 2520HV/HVQ - HT7BS, HT6C, HT6CM - HT6CC, HT6CCM, HT6CCW, HT6CCMW, HT6CCP, HT6CCZ - 25HM
HFB-C	- 35HV/HVQ, 45HV/HVQ, 3520HV/HVQ, 3525HV/HVQ - 4520HV/HVQ, 4525HV/HVQ, 4535HV/HVQ, - 35HVT/HVQT, 45HVT/HVQT, - HT6CP, HT6D, HT6DM, HT6DP, HT7DS, HT6E, HT6EM, HT6EP, HT7ES - HT6DC, HT6DCM, HT6DCP, HT6DCW, HT6DCMW, HT67DC, HT67DCW - HT6EC, HT6ECM, HT6ECP, HT67EC, HT6ED, HT6EDM, HT6EDP, HT7EDS - HT6DCC, HT6DCCM - 35HM, 45HM

Ordering Code




1. Model : HFB

2. Size : A, B, C

Foot Mounts HFB Series

Installation Dimension mm (inch)

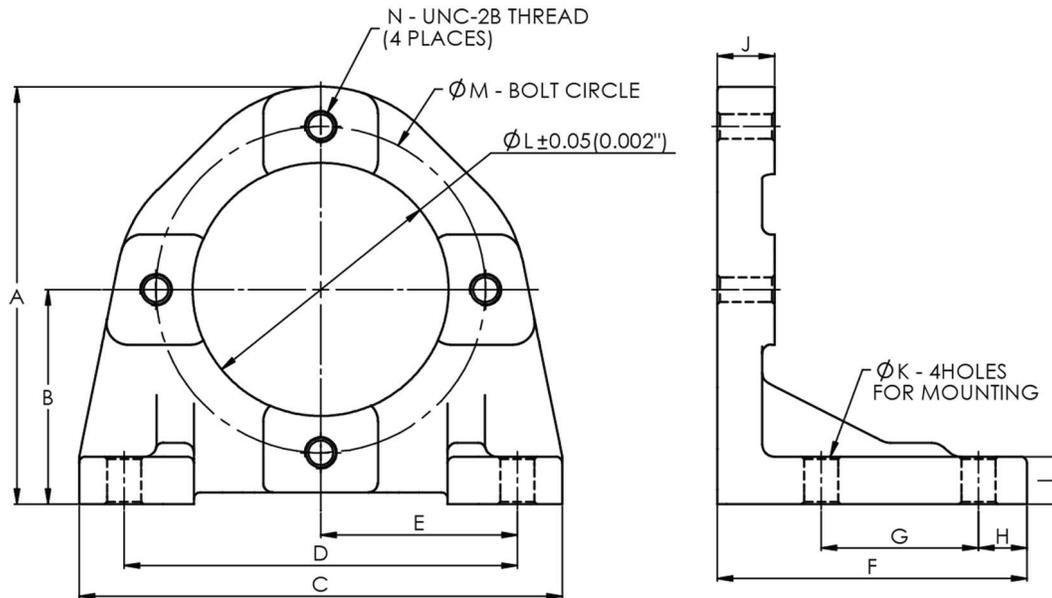

Model	Dimension mm (inch)													
	A	B	C	D	E	F	G	H	I	J	K	L	M	N
HFB-A	134.9 (5.31)	69.9 (2.75)	152.4 (6.00)	127.0 (5.00)	63.5 (2.50)	96.0 (3.78)	50.8 (2.00)	12.7 (0.50)	12.7 (0.50)	17.5 (0.69)	11.0 (0.43)	82.6 (3.25)	106.4 (4.19)	3/8"-16 UNC ($\phi 8.0 \pm 0.1$)
HFB-B	180.8 (7.12)	92.2 (3.03)	171.5 (6.75)	146.0 (5.75)	73.0 (2.87)	95.8 (3.77)	50.8 (2.00)	12.7 (0.50)	12.7 (0.50)	19.0 (0.75)	11.0 (0.43)	101.7 (4.00)	146.0 (5.75)	1/2"-13 UNC ($\phi 10.8 \pm 0.1$)
HFB-C	215.9 (8.50)	109.5 (4.31)	265.2 (10.44)	235.0 (9.25)	117.5 (4.63)	131.6 (5.18)	76.2 (3.00)	17.3 (0.68)	16.7 (0.62)	20.5 (0.80)	17.0 (0.66)	127.1 (5.00)	181.0 (7.13)	5/8"-11UNC ($\phi 13.5 \pm 0.1$)