

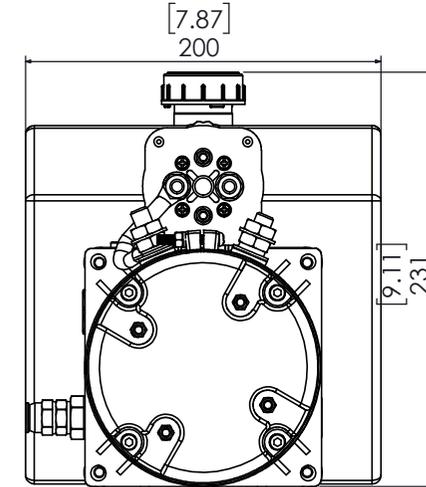


THIS DRAWING IS BEING SUBMITTED FOR YOUR APPROVAL OF THIS DESIGN ON YOUR APPLICATION AND REQUIREMENTS.
A SIGNATURE IS REQUIRED BEFORE AN ORDER CAN BE PROCESSED.




APPROVED BY _____ APPROVAL DATE ____/____/____

REV	DESCRIPTION	DATE	SIGNATURE	CHECKED
XXX	XXX	00/00/00	XXX	XXX
XXX	XXX	00/00/00	XXX	XXX
XXX	XXX	00/00/00	XXX	XXX

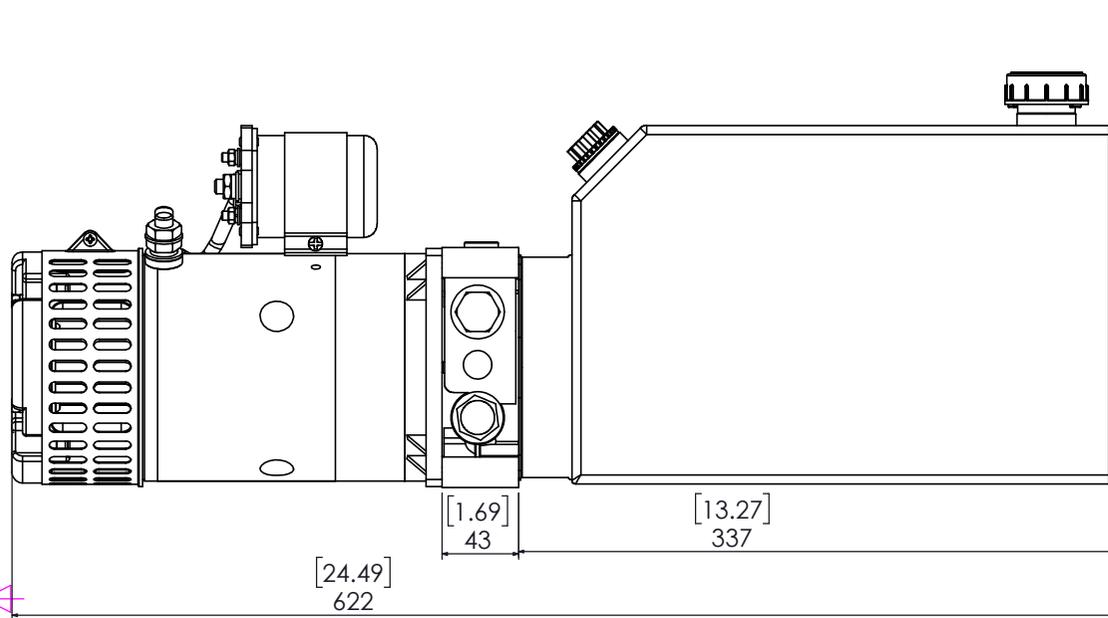

Network 标签

MODEL	30DA010H373B		
Relief Valve Setting	2500PSI		
Motor(KW)	3KW	Voltge	12V
Pump Disp	3.7ML	Flow	8.4LPM
Tank Usable	10	Litres	

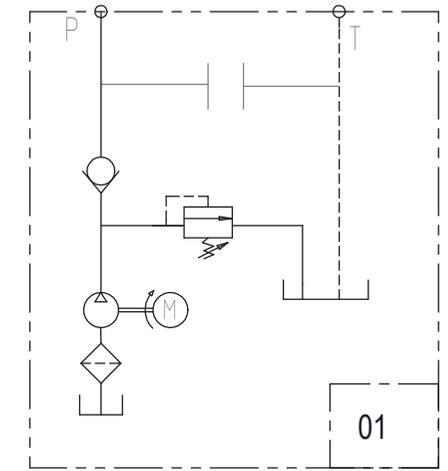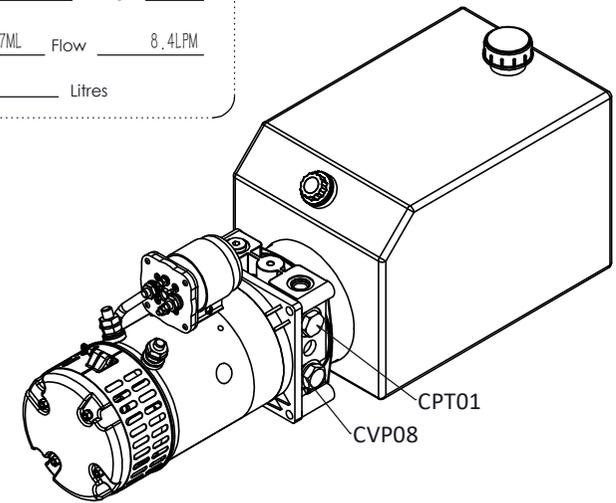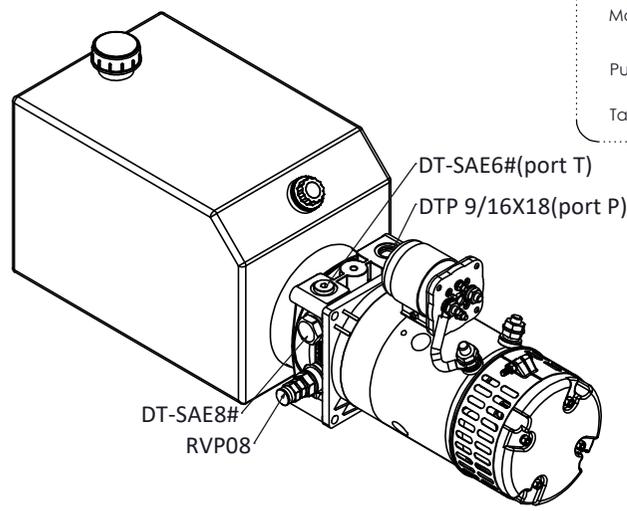

TOLERANCE :mm

> 0	±0.1
> 6	±0.2
> 30	±0.3
> 120	±1
> 315	±2
> 1000	±5



SPECIFICATIONS	
ELECTRICAL MOTOR	530A-F-M,DC12V,3KW
FLOW RATE	8.4LPM@1500PSI
MAX. PRESSURE	3000PSI
RELIEF SETTING	2500PSI
GEAR PUMP DISP.	G370 3.7mL/REV
RESERVOIR	MT3 STEEL 10L
REMOTE CONTROL	N/A
MOUNTING	VERTICAL OR HORIZONTAL
PORTING	SAE6#

DESIGNED_BY KMC	APPROVAL_BY ***	APPROVAL DATE 2020/9/8
--------------------	--------------------	---------------------------

UNIT:[inch]mm REFER TO

CUSTOMER 30DA010H373B	Material number 010101-0165	SCALE
--------------------------	--------------------------------	-------

HYDRAULIC POWER UNIT

30D01-001	REVISION B	PAGES /
------------------	---------------	------------